

Pb Free Plating Product

SBLF1630CT/SBLF1640CT



16.0 Ampere Insulated Pkg Common Cathode Schottky Barrier Rectifier Diodes


Features

- ★ ThinkiSemi Planar NMBR Technology
- ★ Guardring for overvoltage protection
- ★ Ideally Suited for Automatic Assembly
- ★ Low Forward Voltage
- ★ High Surge Current Capability
- ★ Low Leakage Current


Applications

- ★ Freewheeling, Snubber, Clamp
- ★ Solar Junction Box Application
- ★ PFC
- ★ Plating Power Supply
- ★ Ultrasonic Cleaner and Welder
- ★ Converter & Chopper
- ★ UPS/LED SMPS/HID

ITO-220AB/TO-220F-3L Unit : inch (mm)

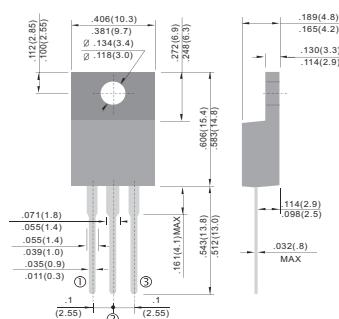

Internal Configuration


Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SBLF1630CT/SBLF1640CT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	45V(Typical>50V)	V
Working peak reverse voltage	V _{RWM}	32	V
Maximum DC blocking voltage	V _{DC}	45V(Typical>50V)	V
Maximum average forward rectified current at $T_C = 95^\circ\text{C}$	Total device Per leg	I _{F(AV)}	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}	250	A
Operating junction and storage temperature range	T _J , T _{TSG}	-40 to +125	°C
RMS Isolation voltage (SBLF type only) from terminals to heatsink with $t = 1.0$ second, RH $\leq 30\%$	V _{ISOL}	4500 (NOTE 1) 3500 (NOTE 2) 1500 (NOTE 3)	V

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum instantaneous forward voltage per leg at 10.0 A (Note 4)	V _F	0.49V	V
Maximum instantaneous reverse current at rated DC blocking voltage per leg (Note 4)	I _R	0.5 50	mA

Thermal Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	SBLF1630CT/SBLF1640CT	Unit
Typical thermal resistance from junction to case per leg	R _{θJC}	3.0	°C/W


Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle


Ratings and Characteristic Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)


Forward Current Derating Curve

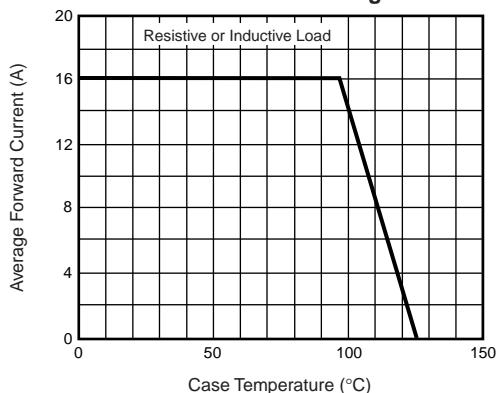


Maximum Non-Repetitive Peak Forward Surge Current Per Leg

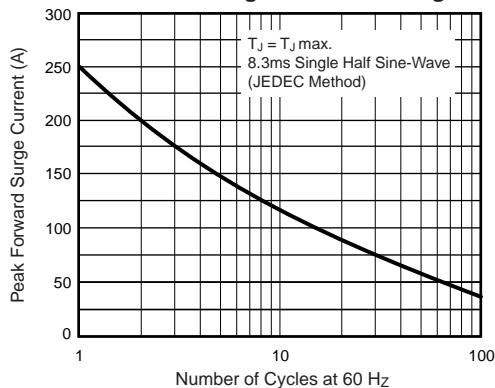


Typical Instantaneous Forward Characteristics Per Leg

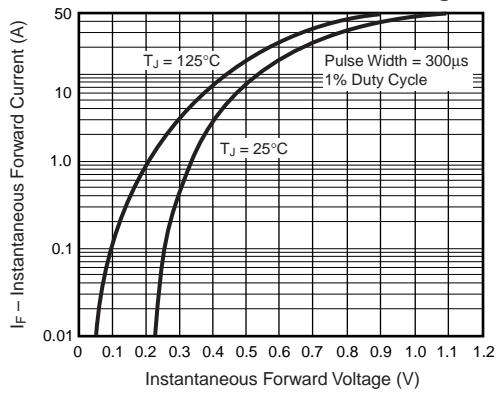

Typical Reverse Characteristics Per Leg

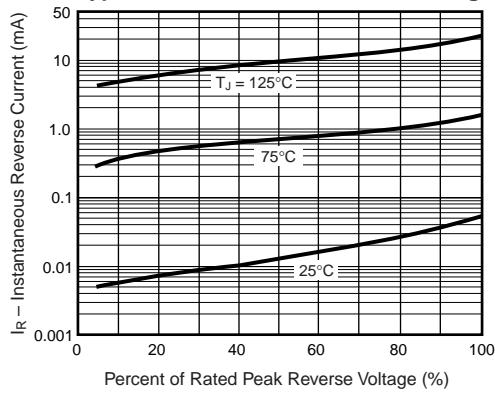

Typical Junction Capacitance Per Leg

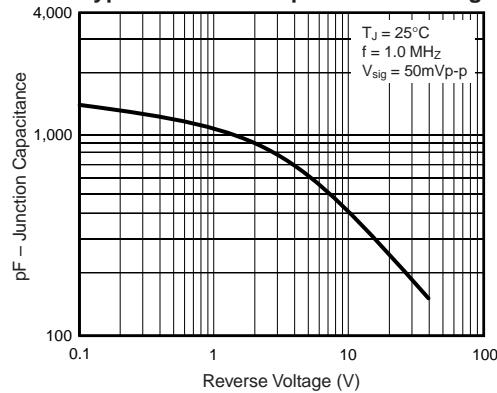

Typical Transient Thermal Impedance Per Leg

