

Pb Free Plating Product


VS-60CTQ045PbF



60 Ampere, 45 Volt Dual Common Cathode Super Schottky Barrier Rectifier

- Features**
- \* ThinkiSemi matured super barrier schottky
  - \* Low forward voltage drop
  - \* High current capability
  - \* Low reverse leakage current
  - \* High surge current capability
- Application
- \* Inverter/UPS
  - \* Plating Power Supply/SMPS
  - \* Car Audio Amplifier and Sound Device System

- Mechanical Data**
- \* Case: Heatsink Open Metal TO-220AB outline
  - \* Epoxy: UL 94V-0 rate flame retardant
  - \* Terminals: Solderable per MIL-STD-202 method 208
  - \* Polarity: As marked on diode body
  - \* Mounting position: Any
  - \* Weight: 2.0 gram approximately

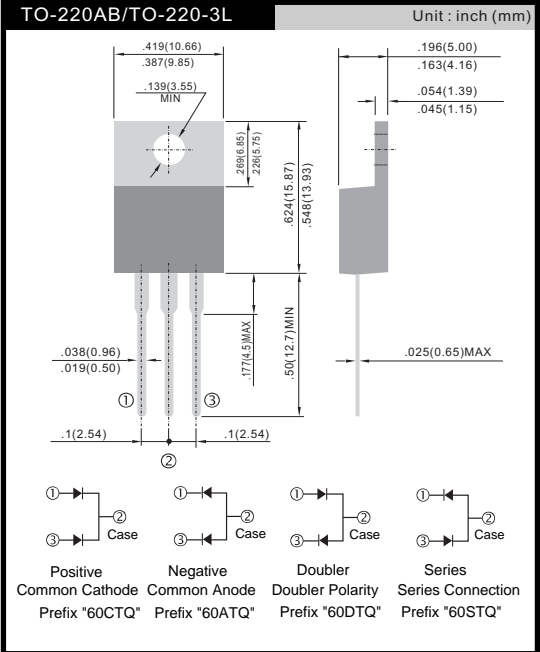

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	SYMBOL	VS-60CTQ045PbF	UNIT	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	45	V	
Maximum RMS voltage	V <sub>RMS</sub>	32	V	
Maximum DC blocking voltage	V <sub>DC</sub>	45	V	
Maximum average forward rectified current	I <sub>F(AV)</sub>	60	A	
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	250	A	
Maximum instantaneous forward voltage (Note 1)	V <sub>F</sub>	I <sub>F</sub> = 30A, T <sub>J</sub> =25°C	V	
		I <sub>F</sub> = 30A, T <sub>J</sub> =125°C		0.55
		I <sub>F</sub> = 60A, T <sub>J</sub> =25°C		0.53
		I <sub>F</sub> = 60A, T <sub>J</sub> =125°C		0.73
Maximum reverse current @ rated V <sub>R</sub>	I <sub>R</sub>	T <sub>J</sub> =25°C	mA	
		T <sub>J</sub> =125°C		0.1
Voltage rate of change (Rated V <sub>R</sub> )	dV/dt	10000	V/μs	
Typical thermal resistance	R <sub>θJC</sub>	1.5	°C/W	
Operating junction temperature range	T <sub>J</sub>	- 55 to +150	°C	
Storage temperature range	T <sub>STG</sub>	- 55 to +175	°C	

Note 1: Pulse test with PW=300μs, 1% duty cycle

RATINGS AND CHARACTERISTICS CURVES

( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

FIG. 1 MAXIMUM FORWARD CURRENT DERATING CURVE

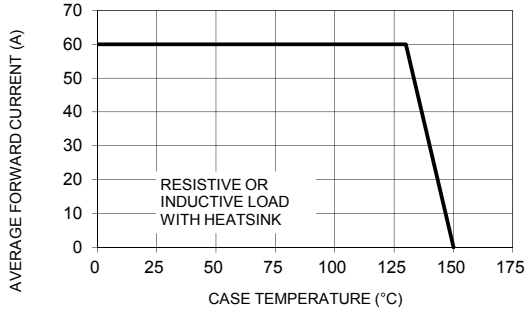


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

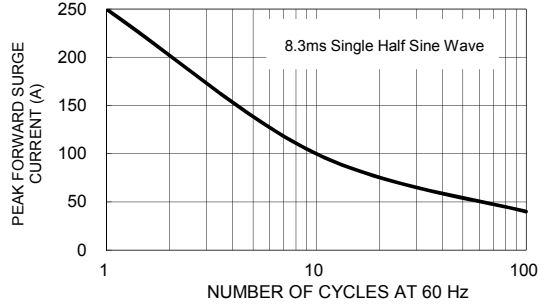


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG

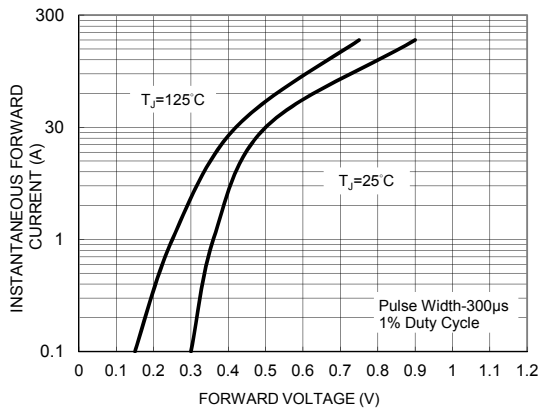


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

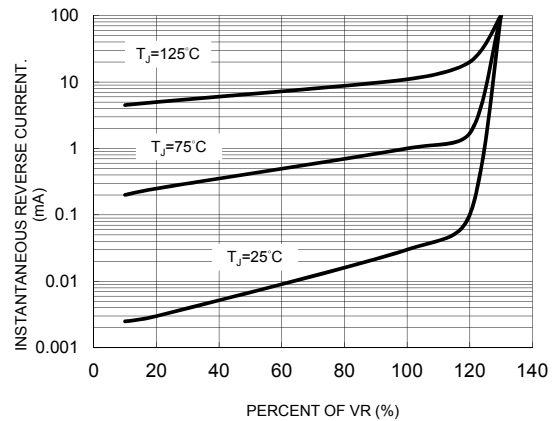


FIG. 5 TYPICAL JUNCTION CAPACITANCE

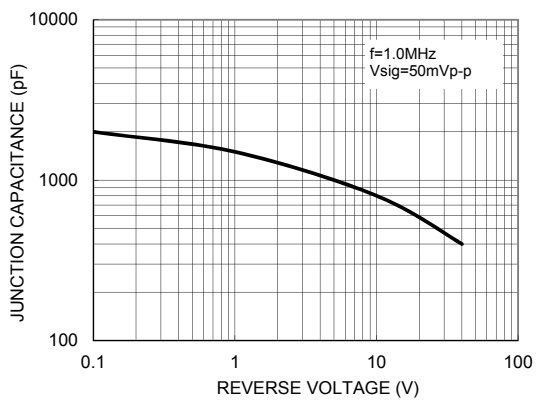


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

